




Recommended Usage


Every second to third step to be lit in a staircase. Use approximately 300-350mm above floor level for a subtle architectural look.




# Astro



## Step Light

The Astro Step Light illuminates stairwells, pathways or along walls. Its angular weather resistant body produces a striking beam that requires only minimal energy usage. As part of the Astro family of products, this step light will fit seamlessly in any architectural application.

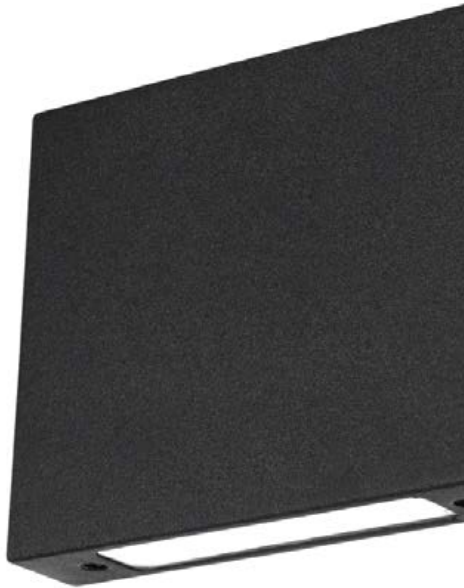


| Options      | 3W                                                                                    |
|--------------|---------------------------------------------------------------------------------------|
| Measurements |  |
| Lumen Output | 150lm (at 3000K)                                                                      |
| Beam Angle   | 110°                                                                                  |



| Specifications                                                                        |                    |
|---------------------------------------------------------------------------------------|--------------------|
| Finishes                                                                              |                    |
|  | UV Textured Black  |
|  | UV Textured White  |
|  | Anodised Aluminium |
| Colour Temperature                                                                    |                    |
|  | 3,000K             |
|  | 4,000K             |
| IP Rating 65                                                                          | CRI 80+            |
| Colour Deviation                                                                      | SDCM ≤ 3 (MacAdam) |

Photometrics

Full technical data available on request



|                          |                                                                                                                                    |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Lifetime                 | Reported L70 > 36,000h                                                                                                             |
| Power Factor             | > 0.90                                                                                                                             |
| Driver (sold separately) | <b>24V IP20</b><br>16W / 36W / 60W<br><br><b>24V IP68</b><br>16W / 36W / 60W / 120W / 320W<br><br>Dimmable driver option available |

Notes

Remote driver required for DALI capabilities. Osram, Tridonic and Meanwell control gear are available upon request. Lumen output may vary depending on colour temperature, beam angle and CRI.

- 3yr Warranty
- DALI Optional
- IP65
- Dimmable Optional
- Coastal Rated

