

MAGNETIC Ultra-slim track LIGHTING SYSTEM


CAUTION:

1. BEFORE INSTALLING THE LIGHT FIXTURES, PLEASE READ THE INSTALLATION INSTRUCTIONS CAREFULLY.
2. DISCONNECT POWER AT CIRCUIT BREAKER BEFORE INSTALLATION OR SERVICING.
3. DO NOT INSTALL THE TRACK IN DAMP OR WET LOCATIONS.
4. THIS TRACK IS IP20, INDOOR USE ONLY.
5. ALL ELECTRICAL CONNECTIONS SHOULD BE DONE BY A QUALIFIED ELECTRICIAN.

AVERTIR:

1. AVANT D'INSTALLER LES LUMINAIRES, VEUILLEZ LIRE ATTENTIVEMENT LES INSTRUCTIONS D'INSTALLATION.
2. DÉBRANCHEZ L'ALIMENTATION AU DISJONCTEUR AVANT L'INSTALLATION OU ENTRETIEN.
3. NE PAS INSTALLER LA CHENILLE DANS DES ENDROIT HUMIDE OU MOUILLÉ.
4. CETTE PISTE EST IP20, UTILISATION EN INTÉRIEUR UNIQUEMENT.
5. TOUS LES RACCORDEMENTS ÉLECTRIQUES DOIVENT ÊTRE EFFECTUÉS PAR UN ÉLECTRICIEN QUALIFIÉ.

TRACK PROFILE

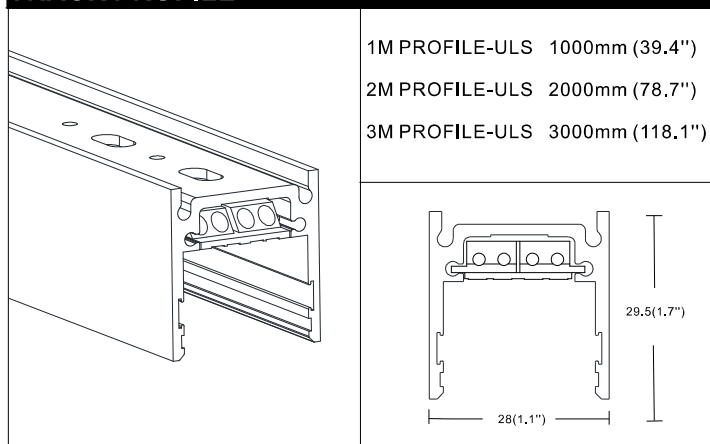

INCLUDED HARDWARE

1 METER TRACK-S INCLUDES:

- 2 × SCREWS  2 × WALL PLUGS 
- 1 × WIRE CLIP 

2 METER TRACK-S INCLUDES:


- 4 × SCREWS  4 × WALL PLUGS 
- 1 × WIRE CLIP 

3 METER TRACK INCLUDES:

- 6 × SCREWS  6 × WALL PLUGS 
- 1 × WIRE CLIP 


INSTALLATION - SURFACE MOUNTED

STEP 1 MARK CENTER LINE WHERE TRACK IS TO BE INSTALLED AND MAKE HOLES IN THE CEILING

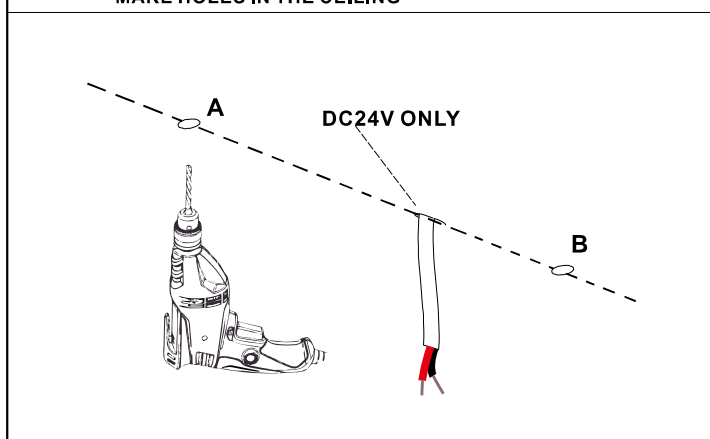


SURFACE/PENDANT/RECESSED TRACK INSTALLATION INSTRUCTIONS


STEP 2 USING PROVIDED ALLEN WRENCH, LOOSEN SET SCREWS ON POWER LOCATION ACCESS COVERS. SLIDE THE COVERS OPEN TO ACCESS THE 24 VOLT POWER CONNECTION.

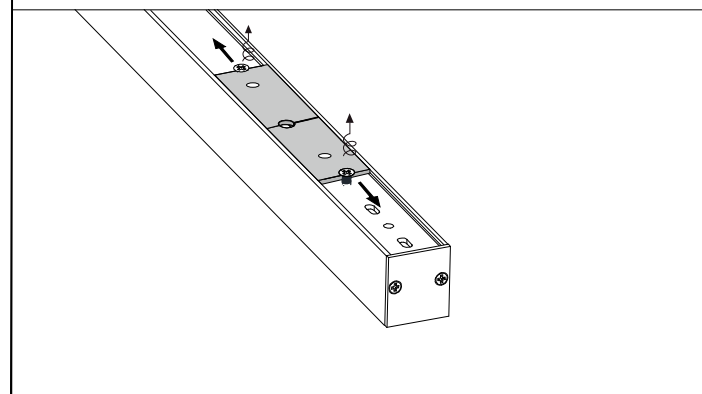


STEP 3 CONNECT 24 VOLT POWER FROM THE DRIVER TO THE TRACK, RED WIRE TO POSITIVE AND BLACK WIRE TO NEGATIVE. ATTACH THE WIRE RESTRAINT TO THE POWER CORD.

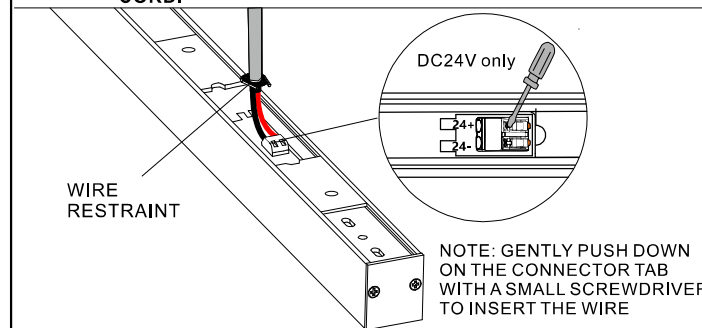


STEP 4 SLIDE COVERS BACK OVER ACCESS HOLE AND TIGHTEN SET SCREWS

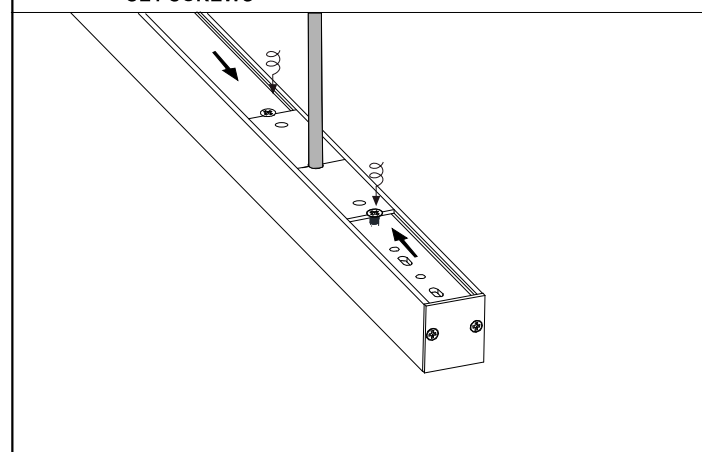


STEP 5 REMOVE DECORATIVE PLATE

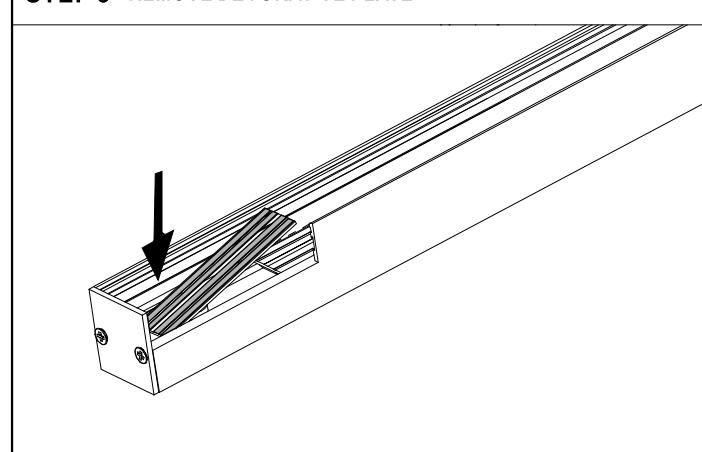


STEP 6 REMOVE MAGNET

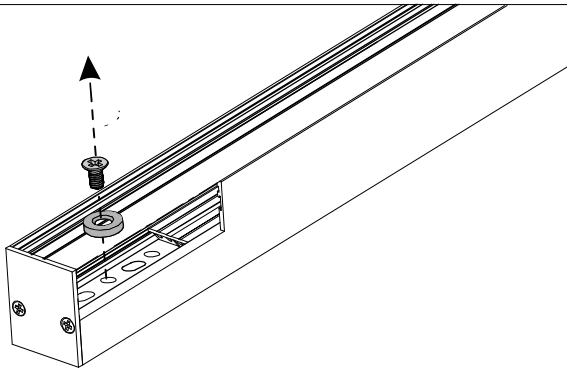


STEP 7 ATTACH ONE END OF TRACK TO CEILING

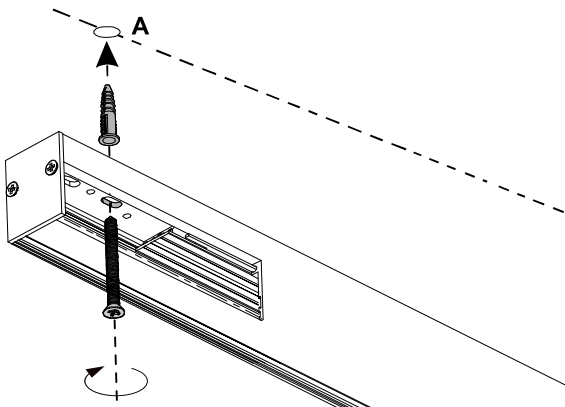

STEP 8 SLIDE PCB BOARDS TO END OF TRACK TO EXPOSE MOUNTING HOLE AT OPPOSITE END OF TRACK




STEP 9 INSTALL DRYWALL ANCHOR AND SET SCREW TO HOLE B

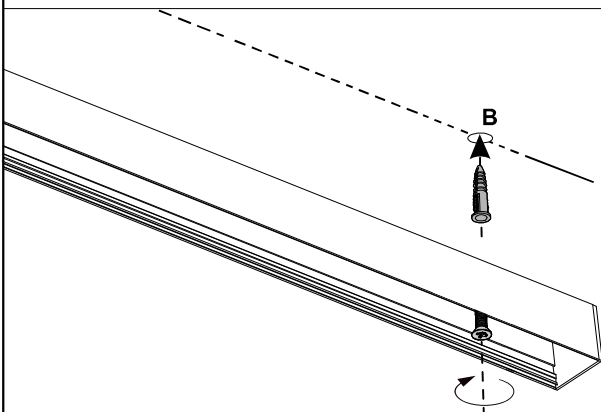


MAGNETIC Ultra-slim track LIGHTING SYSTEM

STEP 10 SLIDE PCB BOARDS TO END OF TRACK TO EXPOSE MOUNTING HOLE AT OPPOSITE END OF TRACK



STEP 11 RE-INSTALL THE MAGNET AND DECORATIVE PLATE

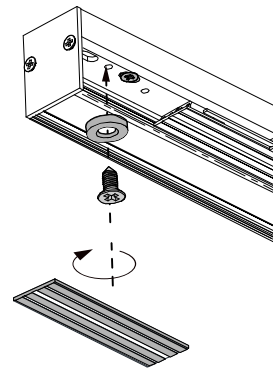

STEP 12 INSTALL THE FIXTURE

